


MAINGUARD No. 79 BLOW-OFF HYDRANT

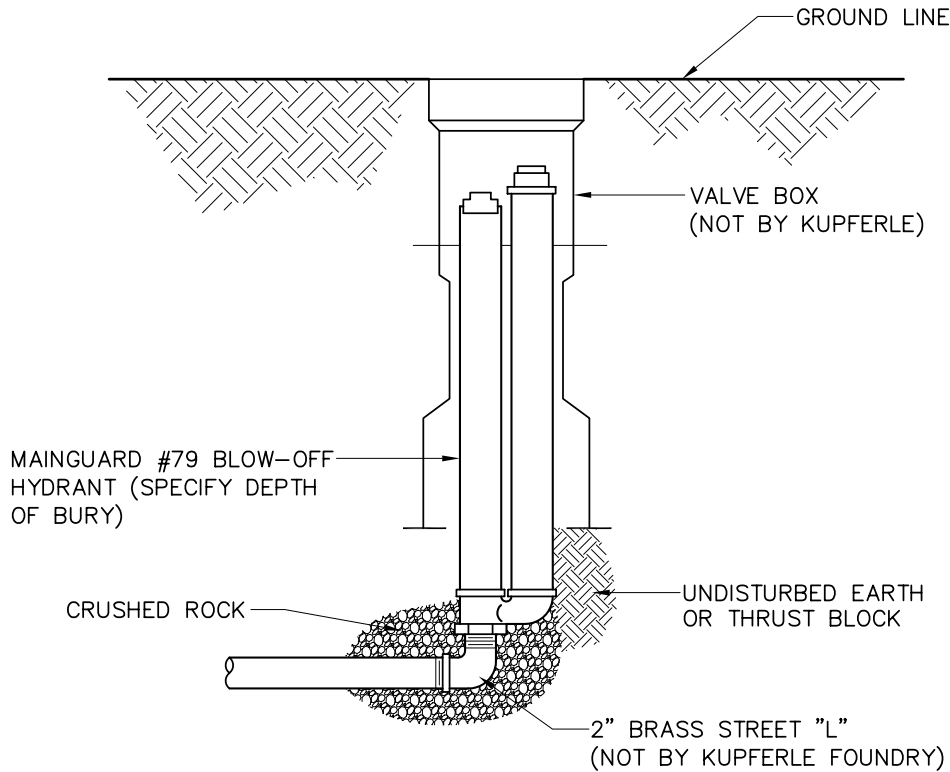

Blow-Off Hydrants shall be non-freezing, self draining type, with an overall length of 4'. Set underground in a 5 1/4" valve box, these hydrants will be furnished with a 2" FIP inlet, a non-turning operating rod, and shall open to the left. All of these working parts shall be of bronze-to-bronze design, and be serviceable from above grade with no digging. The outlet shall be a 2" FIP coupling with plug, as manufactured by Kupferle Foundry Co., St. Louis, MO, or approved equal.

(Specify overall length 6" shorter than normal depth of bury.)

DENVER WATER 1600 West 12th Avenue • Denver, Colorado 80204 Phone (303) 628-6000 • Telecopier No. (303) 628-6851		
STANDARD DESIGN FOR BLOW-OFF HYDRANT		
Scale: <u> NONE </u>	Date: <u> MAY 2000 </u>	
Drawn: <u> C.B.B. </u>	Tr: <u> </u>	Ck: <u> </u>
Approved: <u> </u>	Dr. <u> 127 </u> No. <u> 35 </u>	